

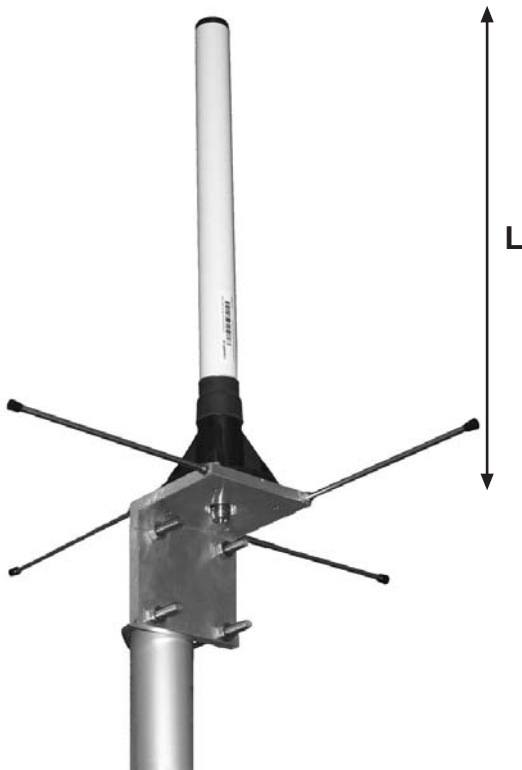


ComAnt[®] Communications Antennas

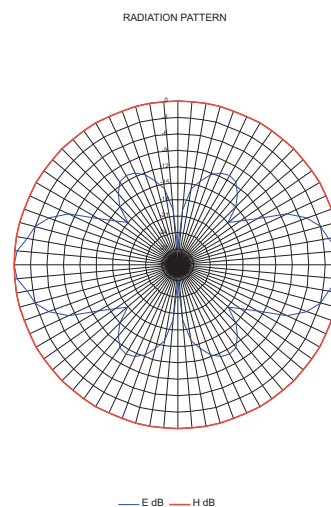

FREQUENCY INDEPENDENT DATA

Description: omnidirectional ground plane
 Frequency: 401-409 MHz, 406-414 MHz, 416-424 MHz, 426-434 MHz, 431-439 MHz, 436-444 MHz, 442-450 MHz, 446-454 MHz, 456-464 MHz, 465-475 MHz, 860-880 MHz
 Impedance: 50 ohm
 Gain: 6 dBi
 Polarization: vertical
 Connector: N-female/TNC-female
 VSWR: < 1.5
 Radome: UV resistant fiberglass, white / PP, black, PU foam filling
 Radiator: copper
 Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self locking nuts
 Lightning protection: DC-short circuited, -grounded
 Temperature: -40° - +80°C
 IP: 67

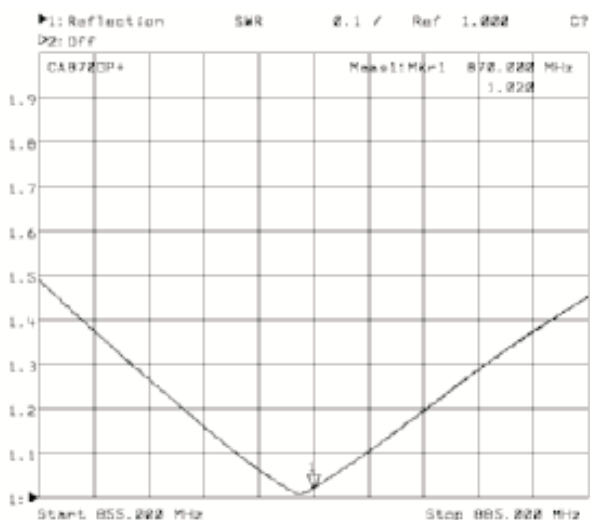

CAGP+ OMNIDIRECTIONAL GROUND PLANE