


ComAnt[®] Communications Antennas

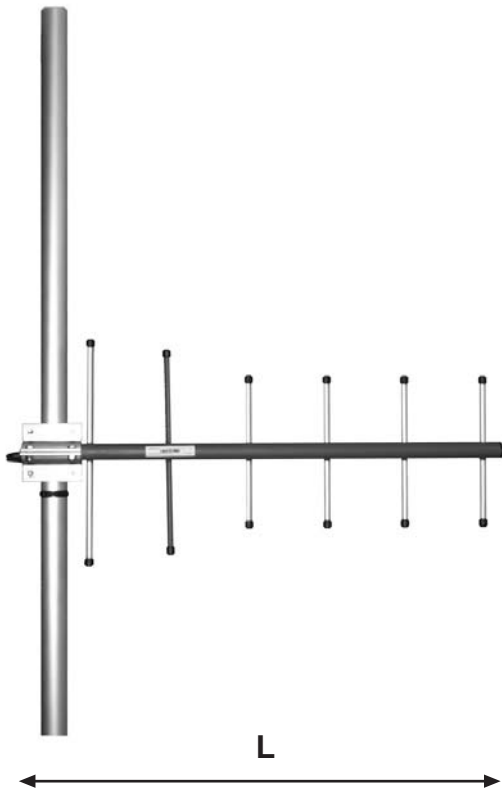



FREQUENCY INDEPENDENT DATA

Description: directional yagi
 Frequency: 365-395 MHz, 380-410 MHz,
 405-440 MHz, 440-475 MHz,
 830-890 MHz, 865-925 MHz,
 890-960 MHz

Impedance: 50 ohm
 Gain: 10 dBi
 Polarization: vertical/horizontal
 Connector: N-female/TNC-female
 VSWR: < 1.5
 Radome: UV resistant ABS, RAL 7012,
 PU foam filling

Radiator: copper
 Passive elements: coated aluminium
 Attachment: Ø 35-60 mm, aluminium alloy
 bracket, stainless steel V-
 bolts and self locking nuts

Lightning protection: DC-short circuited
 Temperature: -40° - +80°C
 IP: 67

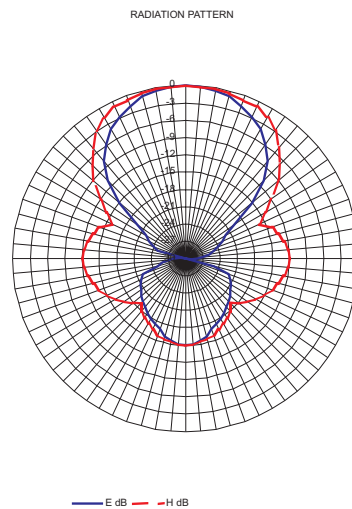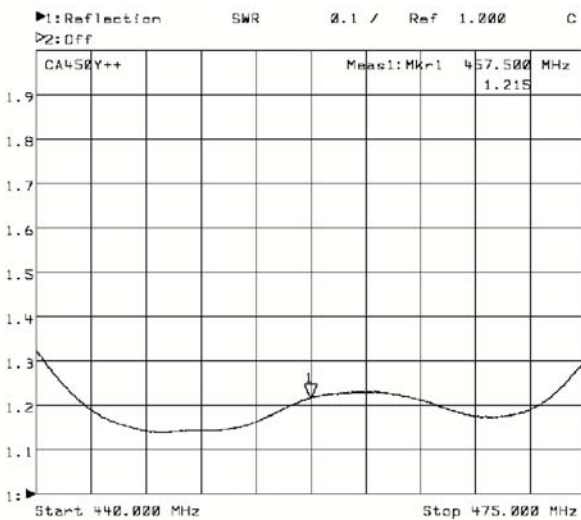

CAY++ DIRECTIONAL YAGI